




SP 188

Steer and Trailer

APPLICATION

Designed for good durability in short to medium haul operations in urban and rural areas.

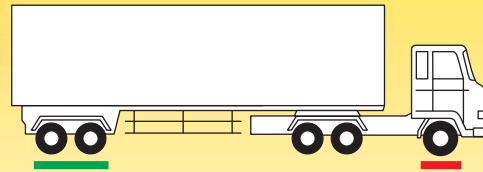

— Recommended

— OK

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
7.50R16	14	122/120	L	TT	805	215	1500	1400	680	6.00 G	12.0
8.25R16	16	128/126	L	TT	855	235	1800	1700	680	6.50 H	12.6
8.25R20	16	133/131	K	TT	974	236	2060	1950	680	6.50	12.6
9.00R20	16	140/137	L	TT	1020	263	2500	2300	730	7.00	13.3
9R22.5	-	133/131	L	TL	976	231	2060	1950	680	6.75	13.3
10R22.5	-	144/142	L	TL	1026	258	2800	2650	850	7.50	14.2

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za

You Tube

DunlopTyresSA



DUNLOP

TAKE THE ROAD