


# SP 431A

Drive Position, Regional and Short Haul

## APPLICATION

A premium pattern-depth steel radial tyre designed specifically for drive-axle fitment for regional haul applications. The unique block pattern offers excellent traction and prolonged tread life without sacrificing retreadability. Can also be used in select off-road conditions thanks to its good stone ejection properties.

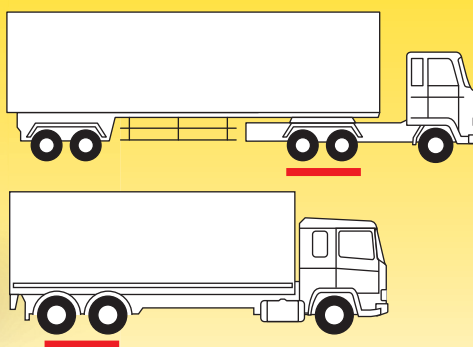

— Recommended

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
12R22.5	16	152/148	L	TL	1098	304	3550	3150	870	9.00	20.2
295/80R22.5	16	152/148	M	TL	1060	308	3550	3150	870	9.00	20.2
315/80R22.5	18	154/150	M	TL	1084	311	3750	3350	830	9.00	20.2

E-mail: [marketing@srigroup.co.za](mailto:marketing@srigroup.co.za)

Website: [www.dunloptyres.co.za](http://www.dunloptyres.co.za)

You Tube      

DunlopTyresSA

 **DUNLOP**  
TAKE THE ROAD