




SP 120

All Wheel Position, Regional Haul

APPLICATION

This tubeless radial tyre provides high mileage in regional to long-haul applications whilst offering superior wet braking performance.

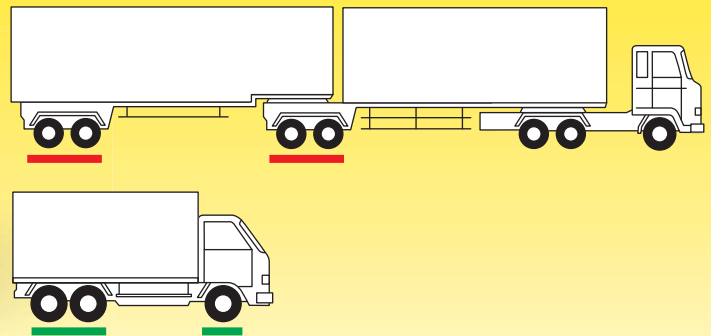

— Recommended
— OK

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
265/70R19.5	18	143/141	J	TL	868	253	2725	2575	775	7,50	13,0

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA

 **DUNLOP**
Driven by Precision