





SP 160

All Wheel Position, Regional Haul

APPLICATION

A 5-rib pattern tyre designed for all wheel positions in regional haul highway operations with excellent casing durability and superb resistance to irregular wear.

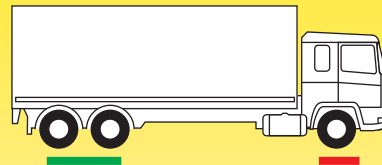

*application specific to 275/70R22.5

— Recommended
— OK

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
10.00R15	18	145/148	F	TT	918	272	2900	3150	850	7,50	12,5
7.50R16	-	122/120	L	TT	803	215	1500	1400	630	6,00	11,5
8.25R16	14	128/126	L	TT	850	223	1800	1700	640	6,50	11,8
8.25R20	14	136/134	L	TT	968	231	2240	2120	675	6,50	12,5
9.00R20	14	140/137	L	TT	1016	259	2500	2300	690	7,00	13,0
10.00R20	16	146/143	L	TT	1048	275	3000	2725	800	7,50	13,2
11.00R20	16	150/146	L	TT	1074	289	3350	3000	825	8,00	13,9
9R22.5	14	136/134	L	TL	967	225	2240	2120	675	6,75	12,5
10R22.5	14	144/142	L	TL	1015	247	2800	2650	790	7,50	13,0
11R22.5	16	148/145	L	TL	1049	275	3150	2900	830	8,25	13,4
*275/70R22.5	-	148/145	L	TL	959	274	3150	2900	900	8,25	13,4

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA



DUNLOP
Driven by Precision