




SP 261

Premium Steer

APPLICATION

Wide base tyre for long haul, highway operations.
The 5-rib pattern is ideally suited for steer positions to optimise performance.

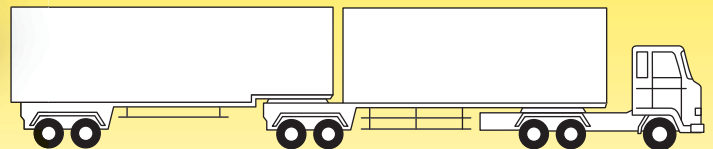

Recommended

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
385/65R22.5	-	160 158	K L	TL	1074	378	4500 4250	NA	900	11,75	16,5

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA



DUNLOP
Driven by Precision