




SP 430

All Wheel Position, Regional Haul

APPLICATION

A sturdy 4-rib pattern with notches at the outer rib that provides high mileage and improved wet performance. Recommended for regional haul highway operations in all wheel positions.

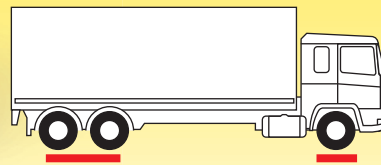

— Recommended

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
225/90R17.5	14	128/126	L	TL	862	230	1800	1700	640	6,75	14.9/15.4

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA

 **DUNLOP**
Driven by Precision