




SP 502

All Wheel Position

APPLICATION

An all wheel position tyre designed for on- and off-road applications. The grooves are designed to prevent stone retention and irregular wear.

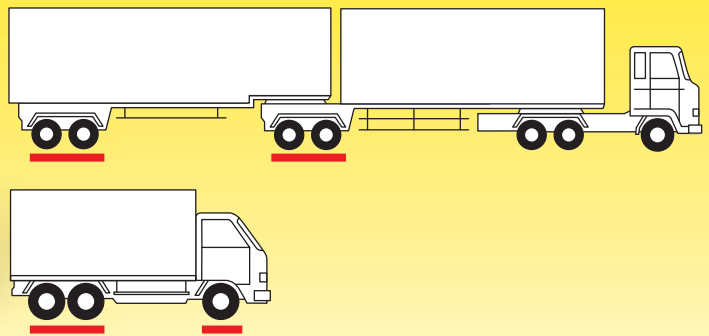

— Recommended

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
265/70R19.5	18	143/141	J	TL	871	253	2725	2575	775	7,50	14,4

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA



DUNLOP
Driven by Precision