



SP 811

All Wheel Position

APPLICATION

An all wheel position tyre designed for short and medium haul use both on- and off-road. The rugged tread pattern design and special tread compound provides outstanding traction and cut and wear resistance. Excellent retreadability.

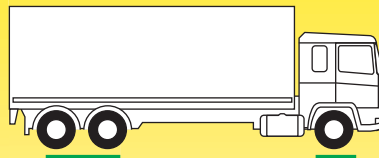

Recommended
OK



Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (kPa)	Recommended Rim (J)	Tread Depth (mm)
9.00R20	14	141/139	K	TT	1021	264	2575	2430	690	7,00	14,4

E-mail: marketing@srigroup.co.za

Website: www.dunloptyres.co.za



DunlopTyresSA



DUNLOP
Driven by Precision